

SPECIFICATIONS

Mechanical

Mating Force: 3.50Kg (7.71Lb) max.
Unmating Force: 1.00Kg (2.20Lb) min.
Durability: 1500 Cycles


Electrical

Current Rating: 1.5A
Contact Resistance: 30mΩ max.
Dielectric Withstanding Voltage: 500V AC/1min min.
Insulation Resistance: 1000MΩ min.


Physical

Housing: Thermoplastic, UL 94V-0 rated
Contact and Shell: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55°C to +85°C

UB Series
Right Angle, T/H
4 Pos.



DRAWING

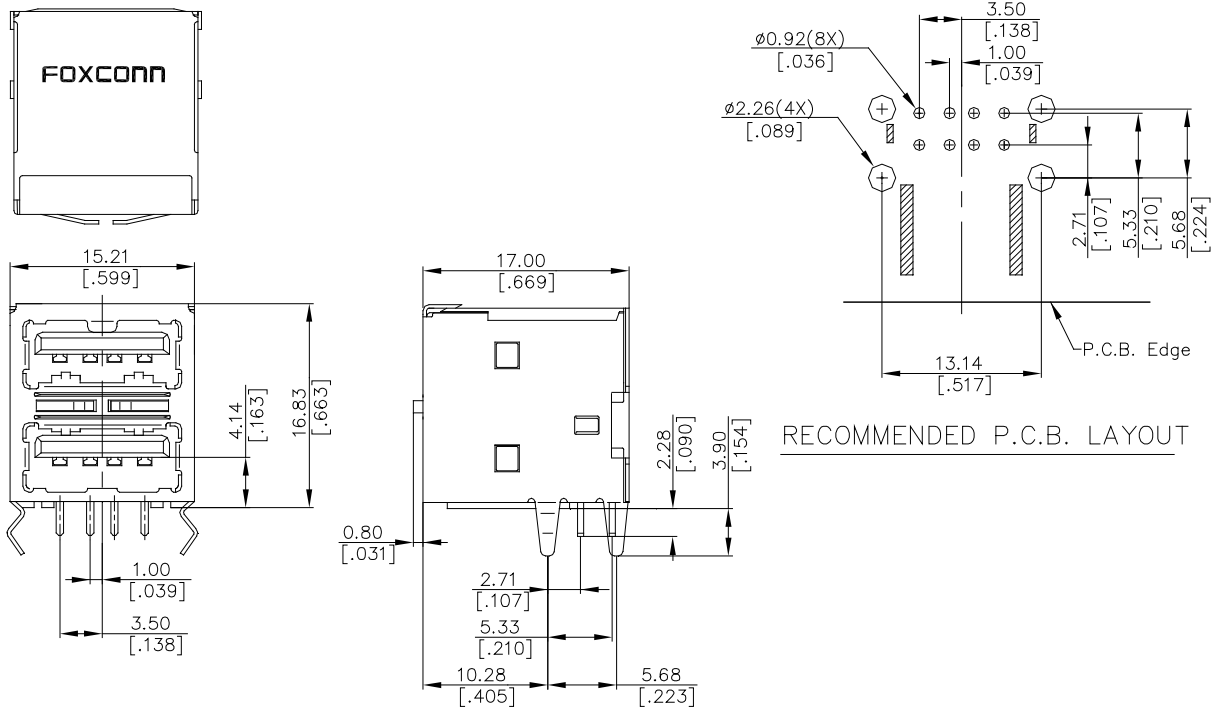

ORDERING INFORMATION

PRODUCT NO.: **UB 1 1 1 2 C - D1 - 4F**

- USB Series: UB
- USB A Type: 1
- Termination Type: 1=RIGHT ANGLE
- Contact Design Type: 1=Female Contact
- No. of Pos: 1= 4 Pos.
- 4=Soft Tray
- F=Lead Free
- Modification Code: C
- Contact Area Plated: C=Gold Flash & 30u" Pd/Ni
- Profile Height: 2=4.13 mm